



The S-3C is a flush mounted panel with manual start/stop and engine monitoring analog gauges. The S-3C panel controls the engine pre-heat circuitry and the start/stop operations of Northern Lights Generator.


The S-3C monitors:

- Engine hours
- Battery voltage
- Engine oil pressure
- Engine water temperature

Features:

- Simple, reliable gauges
- Flush mount plate 7" W x 5-1/4" H
- Can be used as a remote panel (S-3CR) for analog auto start applications

PHYSICAL DIMENSIONS

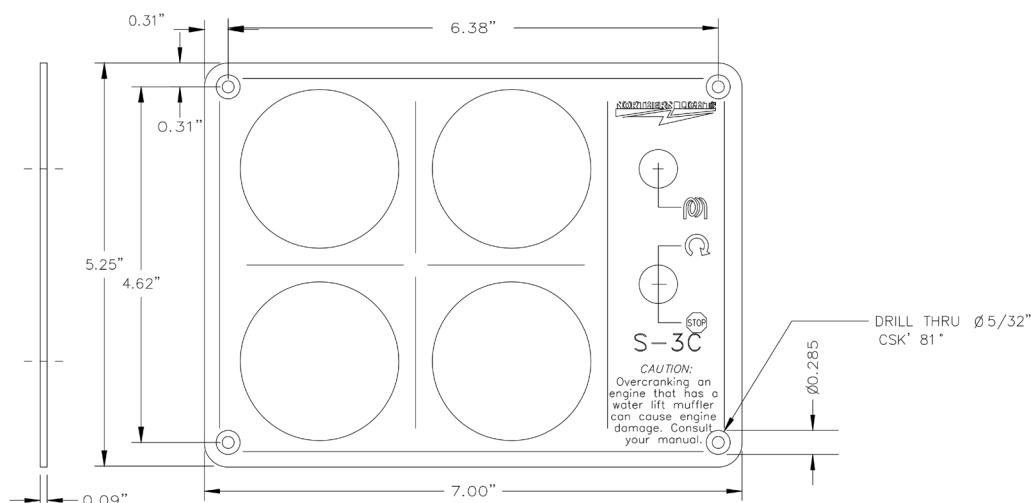

To start the engine hold Pre-heat / Shutdown bypass switch for 10 seconds before attempting start-up. Hold Start/Stop switch in the START position until the engine is running, release switch and it will return to RUN position.

Keep Pre-heat/Shutdown bypass switch engaged while starting the engine, and for 2 to 3 seconds afterwards, allowing oil pressure to build beyond shutdown set point. To Stop the engine, press switch to STOP position.